


12

**DK-Lok, Pipe Fittings
& HIP Fittings**

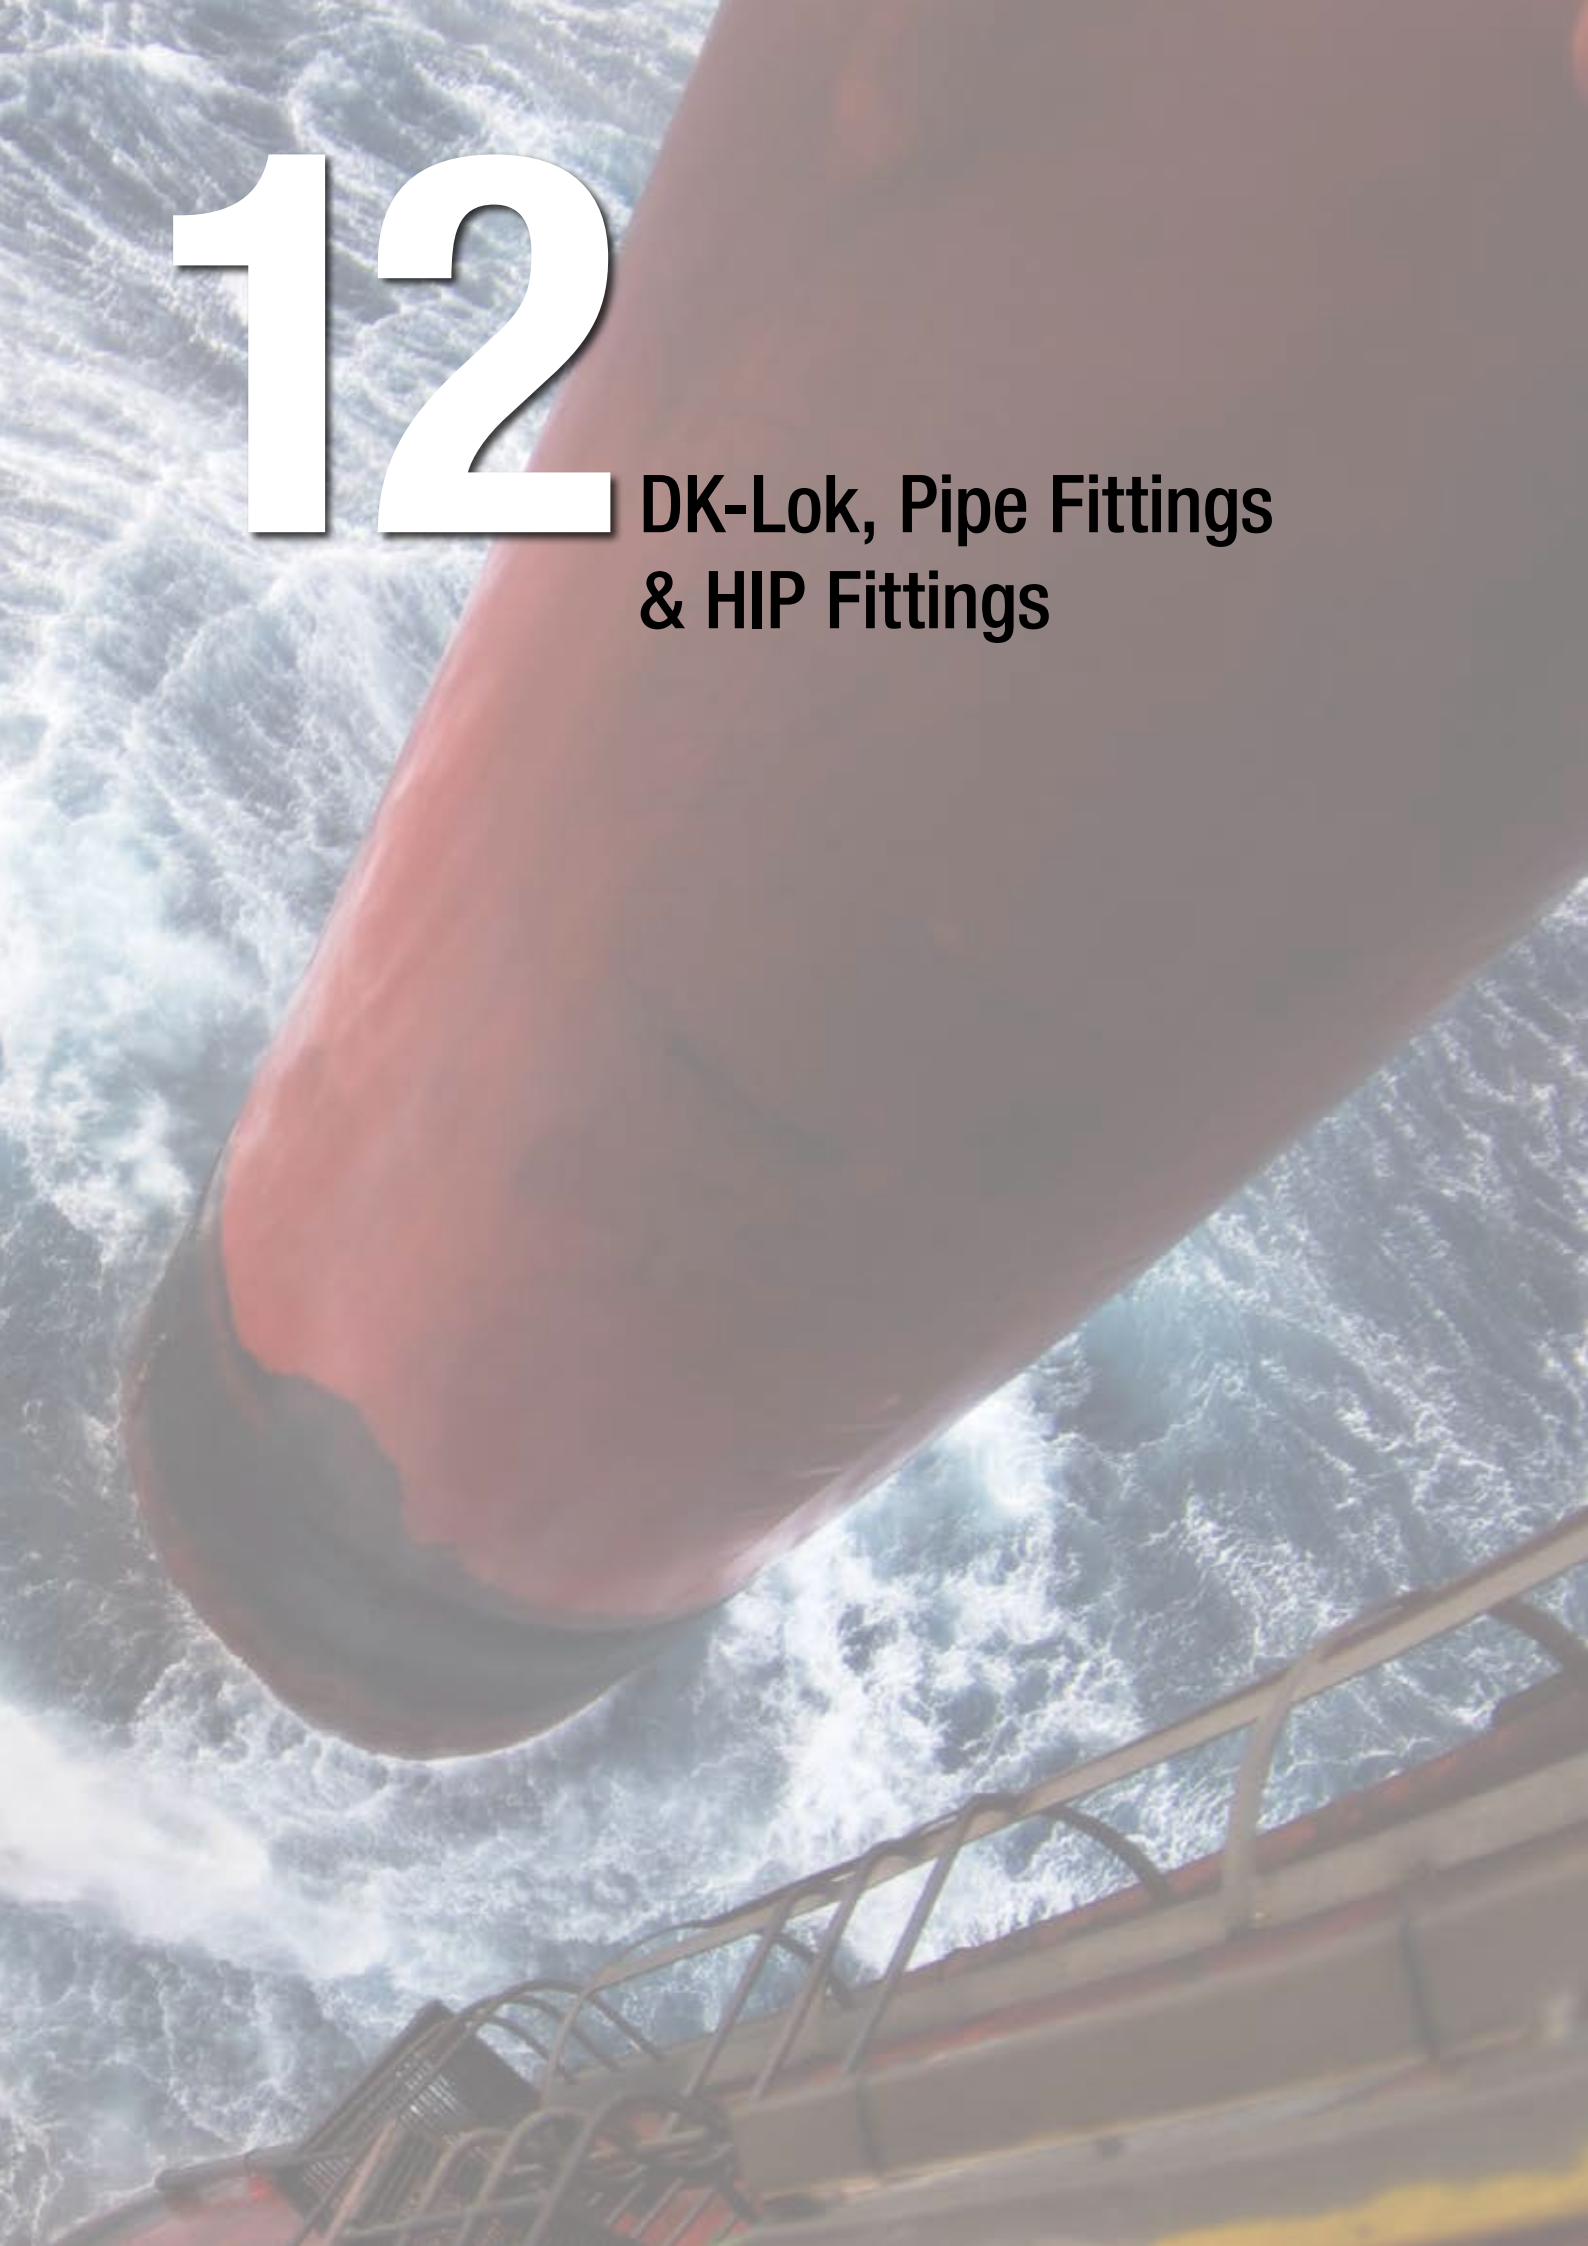

DK-LOK, TWIN FERRULE FITTINGS

Sizes: From 2mm-38mm. Inches from 1/16" - 2"

Material: 316, Brass, Carbon steel, Superduplex, Titanium, Monel, Hastelloy C, Inconel 600 etc.

Union  P/N: DU-*	Elbow  P/N: DL-*	Tee  P/N: DT-*	Cross  P/N: DX-*	Bulkhead Union  P/N: DUB-*
Bulkhead retainer  P/N: DBR-*	Bulkhead Elbow Union  P/N: DLB-*	Reducing Union  P/N: DUR-*	Red Union Elbow  P/N: DLR-*	Red Union Cross  P/N: DXR-*
Red Union Tee  P/N: DTR-*	Male Connector  P/N: DMC-*	Thermocoupler  P/N: DMCT-*	Male Connector  P/N: DMC-G-*	Bulkhead Male Con.  P/N: DMCB-*
Male Elbow 45  P/N: DLBM-*	Male Elbow  P/N: DLM-*	Male Run Tee  P/N: DTRM-*	Male Branch tee  P/N: DTBM-*	Fem. Connector  P/N: DCF-*
Bulkhead Fem Connector  P/N: DCBF-*	Female Elbow  P/N: DLF-*	Fem Run tee  P/N: DTRF-*	Fem Branch Tee  P/N: DTBF-*	Reducer  P/N: DR-*
Bulkhead Adaptor  P/N: DAB-*	Male Adaptor  P/N: DAM-*	Male Adaptor  P/N: DAM-G*	Female Adaptor  P/N: DAF-*	Elbow Adaptor  P/N: DLA-*






For details, catalog available.

Run Tee Adaptor	Branch Tee Adaptor	Port Connector	Red Port Connector	DK Flange
				
P/N: DTRA-*	P/N: DTBA-*	P/N: DCP-*	P/N: DCRP-*	P/N: DF-*
Lab Joint Flange Connector	Union DK - JIC	Bulkhead DK - JIC	Male Adapto JIC	Adaptor JIC-DK
				
P/N: DLJ-*	P/N: DUA-*	P/N: DUBA-*	P/N: DMAA-*	P/N: DAA-*
Plug	Cap	Tube Insert	Fuse Plug	Vent Protector
				
P/N: DP-*	P/N: DC-*	P/N: DI-*	P/N: DFA-*	P/N: DMD-*
Nut	Ferrule Set	Nut-Ferrule Set	Front Ferrule	Back Ferrule
				
P/N: DN-*	P/N: DFS-*	P/N: DFSN-*	P/N: DFF-*	P/N: DFB-*
Preswaging Tool	Gap gauge	Tube Depth Marking Tool	Hydraulic Unit Swaging	Electric Swaging Unit
				
P/N: DPS-'	P/N: DIG-*	P/N: DTM-*	P/N: DHS-2A	P/N: DES-1A
Dowty Seal	Copper Gasket	Weld Connector	Socket weld Connector	Positional Elbow
				
P/N: DGV-*	P/N: DGG-*	P/N: DCW-*	P/N: DCSW-*	P/N: DLM-GP








PIPE FITTINGS: NPT & BSPP & JIC & SAE

Pressure: 3000/6000/10000/15000 PSI

Material: 316, Brass, Carbon steel, Superduplex, Titanium, Monel, Hastelloy C, Inconel 600 etc.

<p>HEX NIPPLE</p>  <p>P/N: GNH-*</p>	<p>HEX RED.NIPPLE</p>  <p>P/N: GNR-*</p>	<p>CLOSE NIPPLE</p>  <p>P/N: GNC-*</p>	<p>HEX NIPPLE NPT x BSPP</p>  <p>P/N: GNH-NG-*</p>
<p>HEX LONG NIPPLE</p>  <p>P/N: GNL-*</p>	<p>ADAPTOR M/F</p>  <p>P/N: GAAMF-*</p>	<p>REDUCED ADAPTOR</p>  <p>P/N: GABMF-*</p>	<p>ADAPTOR BSPP x NPT</p>  <p>P/N: GADMF-*</p>
<p>REDUCED BUSHING</p>  <p>P/N: GHB-*</p>	<p>CROSS</p>  <p>P/N: GX-*</p>	<p>PIPE CAP</p>  <p>P/N: GC-*</p>	<p>PIPE PLUG</p>  <p>P/N: GP-*</p>
<p>HEX COUPLING</p>  <p>P/N: GCG-*</p>	<p>HEX RED COUPLING</p>  <p>P/N: GCGR-*</p>	<p>FEMALE ELBOW</p>  <p>P/N: GL-*</p>	<p>STREET ELBOW</p>  <p>10B-16 P/N: GLS-*</p>
<p>RED STREET ELBOW</p>  <p>P/N: GLSR-*</p>	<p>MALE ELBOW</p>  <p>P/N: GLM-*</p>	<p>FEMALE TEE</p>  <p>P/N: GT-*</p>	<p>RUN TEE</p>  <p>P/N: GTR-*</p>

For details, catalog available.

BRANCH TEE	MALE TEE	UNION FF	HOLLOW HEX PLUG
			
P/N: GTB-*	P/N: GTM-*	P/N: GJU-*	P/N: GBP-*
ADAPTOR NPT X BSPP	HOLLOW PLUG SAE	PIPE FITTINGS HY-DRAULIC RANGE	
			
P/N: GACMF-*	P/N: GPA-*		

Other fittings and materials on request.

Performance under pressure

Proven valves, fittings & tubing for all your
high pressure needs



High Pressure Valves

- Six valve patterns for reliable and flexible shut-off
- Valve bodies through 100,000 psi are high tensile 316 S/S, 150,000 psi valve bodies are 17-4 PH S/S
- Stem assemblies have non-rotating tips to prevent galling with valve seats
- Packing is located below the stem threads to prevent contact with media (liquid or gas)
- Tubing and pipe connections from 1/16" through 1"

Valve Pressure Classes:

- Taper Seal – compression style, 10,000 & 15,000 psi., OD tubing sizes 1/16", 1/8", 1/4" & 3/8"
- NPT – National Pipe Thread, 10,000 & 15,000 psi., sizes 1/8", 1/4", 3/8", 1/2" NPT, 3/4" NPT & 1" NPT
- Medium Pressure – coned and threaded, 20,000 psi., OD tubing sizes 1/4", 3/8", 9/16", 3/4" & 1"
- High Pressure – coned and threaded, 30,000 to 60,000 psi., OD tubing sizes 1/8", 1/4", 3/8", 9/16" & 1"
- Ultra High Pressure – coned and threaded, 100,000 & 150,000 psi., OD tubing sizes 1/4" & 3/8"



High Pressure Fittings

- Complete range of elbows, tees, and crosses for all pressure classes and tubing connections
- Constructed of high tensile 316 stainless steel
- Full line of union couplings, bulkhead couplings, caps, line filters, ball check valves, soft seat check valves, safety heads and rupture discs
- Accessories include adapters, NPT & hose fittings, thermocouple adapters and pressure gauges



Air Operated Valves

- Five lines of air operators accommodate remote operation of high pressure valves up to 100,000 psi.
- Diaphragm and piston operated valves available in both normally open and normally closed models
- Operators controlled by air regulator, electrical solenoid or low pressure manual valve
- Remetco air operated valves provide remote operation for fine metering applications



High Pressure Tubing

- Tubing is cold drawn, seamless 316 S/S and supplied in 1/8 hard condition (not annealed)
- Tensile strength approximately 40 percent higher than annealed tubing
- Connection sizes from 1/8" to 1" OD
- Coned and threaded nipples constructed of 316 S/S and stocked in lengths from 2-1/4" to 12"



Specialty Valves

- Ball valves in two-way and three-way configurations for standard and severe duty to 20,000 psi.
- Hastelloy C-276 and other special materials are available and often in inventory
- High temperature valves to 1,000°F (538°C)
- Micro control metering valves provide precise control of flow
- Relief valves protect a system from over-pressure damage and failure to 30,000 psi.
- Pipe connection and male bottom connection valves

ISO 9001

**HiP...Our Name
is High Pressure**

Call 814-838-2028 or
1-800-289-7447 or visit
www.highpressure.com

**High Pressure
Equipment
Company**

